


PROUDLY MADE IN INDIA



ONE OF THE LARGEST
LOP & COP
ARD & UPS
MANUFACTURER

Newly Launched in 2024

WORLD'S SLIMMEST
UNIVERSAL COP



ROUND LOP



The Circle of influence

INDIA'S FIRST
FOLDABLE DOOR
SENSOR



**PRODUCT
CATALOGUE**


 **LIFT** *byte*®
Transforming Ideas into Reality

STELLAR | COP

curve

stainless steel + acrylic

Curved Edges

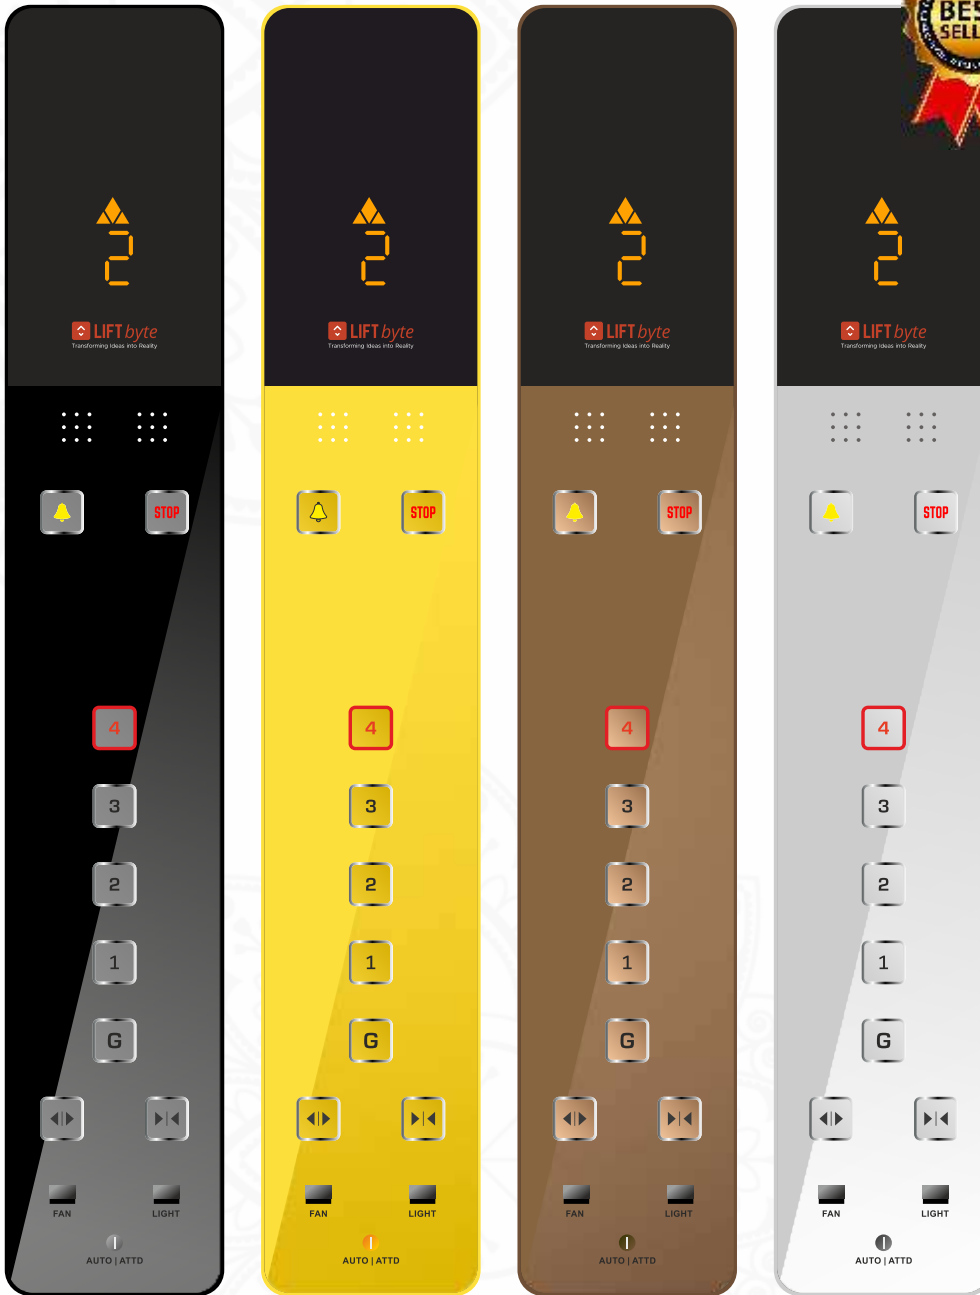

Black Mirror

Gold Mirror

Rosegold Mirror

SS Hairline

COP Size: 1000 mm X 170 mm

SS + Acrylic

Original Design

Imported Buttons

Curved Frame

Diecasted

Boxed Assembly

Safety


Available **Button** Options



Round Button

Square Button

Available frame colors for **utmost luxury.**



Aluminium diecasted curved frame with longevity and rustfree operation




Curved Edges

STELLAR square | COP

stainless steel + acrylic

Square Edges

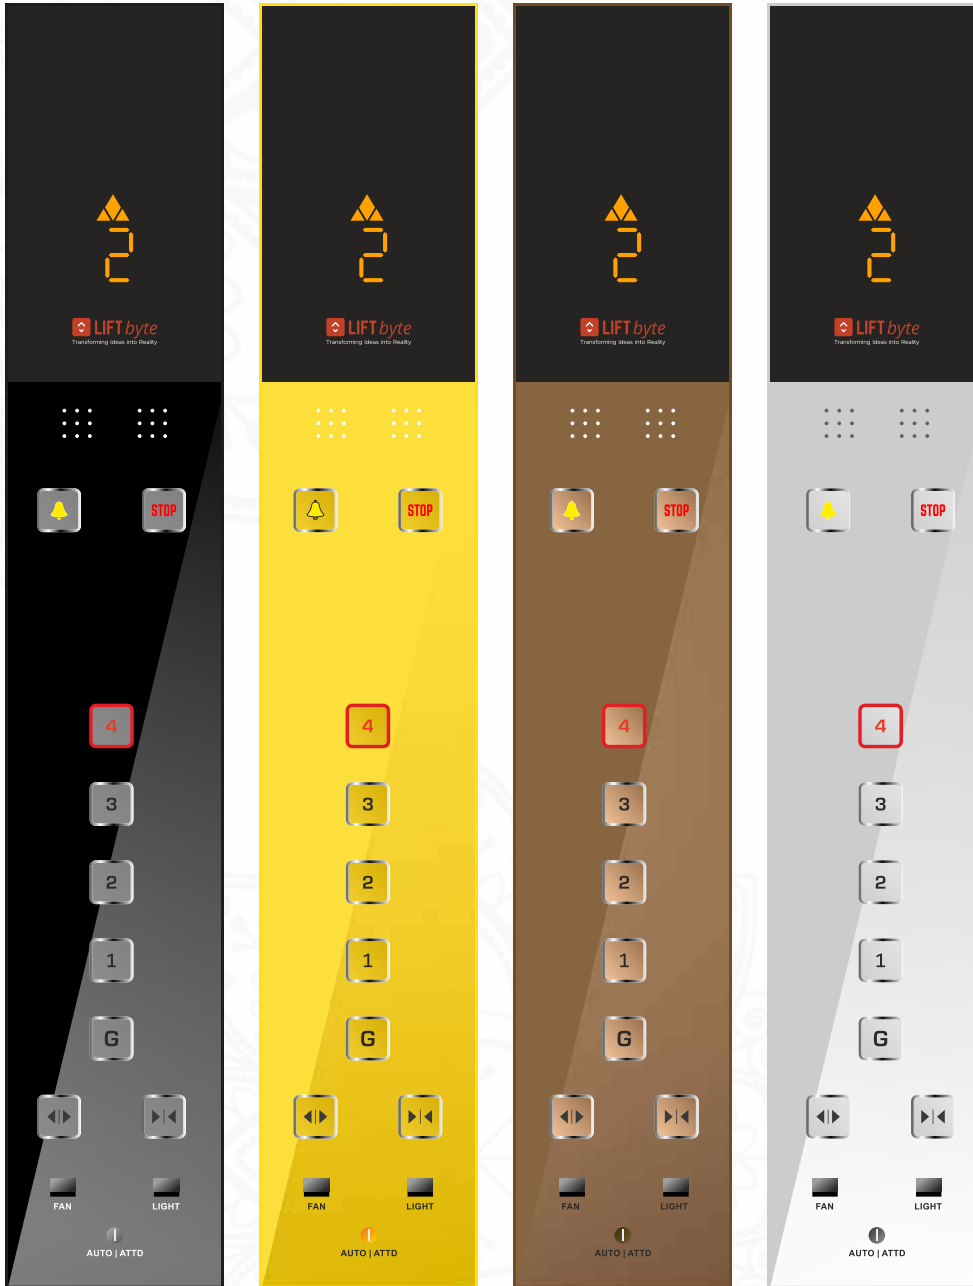

Black Mirror

Gold Mirror

Rosegold Mirror

SS Hairline

COP Size: 1000 mm X 170 mm

SS + Acrylic 

Original Design 

Imported Buttons 

Square Frame 

Diecasted 

Boxed Assembly 

Safety 

Available **Button** Options




Round Button



Square Button

Available frame colors for **utmost luxury.**



Aluminium diecasted curved frame with longevity and rustfree operation



Square Edges

ACCESS CONTROL OPTIONS

Password & RFID




Biometric with RFID & Password




Face with Biometric Password & RFID




Password & RFID with Touch



Biometric with RFID & Password with Touch



Only RFID



DISPLAY OPTIONS


7 Segment




TFT LCD




Graphic LCD



Amber Dot



Red Dot



White Dot



STELLAR | LOP

stainless steel + acrylic

FRAME OPTIONS



Standard Frame
280 x 75 mm



Jumbo Frame
330 x 100 mm

FRAME COLOR OPTIONS



Black

Gold

Rose
Gold

Silver

JUPITER | VENUS

stainless steel + acrylic

economical

Curved Edges



JUPITER

COP Size: 800 mm X 170 mm



JUPITER LOP

LOP Size: 280 x 75 mm



VENUS LOP

LOP Size: 280 x 75 mm

Square Edges



VENUS

COP Size: 800 mm X 170 mm



VILLA | LOP & COP

stainless steel + acrylic

Curved Edges



SS Gold Mirror



SS Hairline




SS Rosegold Mirror

COP Size: 500 mm X 170 mm



LOP Size: 215 mm X 60 mm

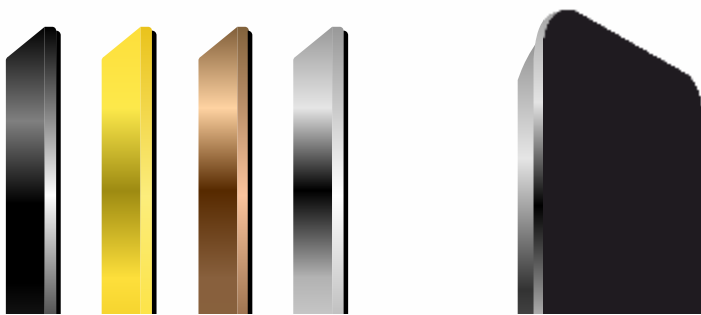

Next Gen AI Elevator COP LOP
Modern Touch Interface

2.1 Touch - Toughened Glass

2.2 Touch Acrylic Curve


2.3 Touch Acrylic Square

2.4 Touch Android 10.1 Inch

Microcontroller based Touch. Recalibrates Itself Overtime.

We Call it AI Touch !


Our touch buttons calibrate itself over period, it sets itself according to the material property due to which the performance over glass and acrylic is same. It works like magic.

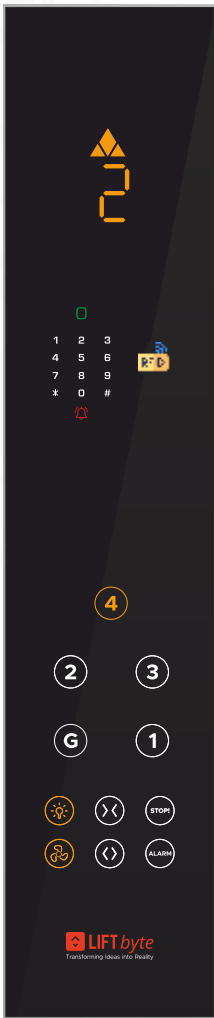

1000 mm X 200 mm
Black
Glass COP
Glass Thickness: 5mm



1000 mm X 200 mm
White
Glass COP
Glass Thickness: 5mm

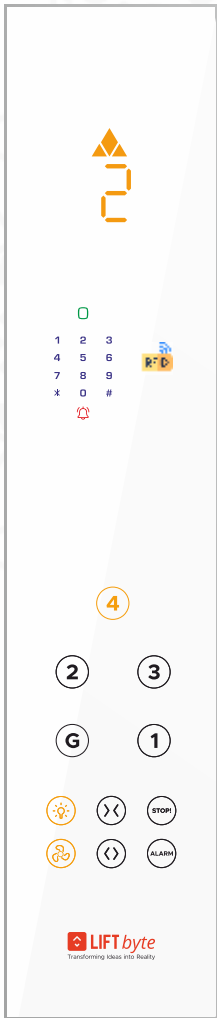

1000 mm X 200 mm
White
Glass COP
Glass Thickness: 5mm



330 x 100 mm
Black
Glass Jumbo LOP
Glass Thickness: 2mm




330 x 100 mm
White
Glass Jumbo LOP
Glass Thickness: 2mm



330 x 100 mm
White
Glass Jumbo LOP
Glass Thickness: 2mm

acrylic

Square Edges

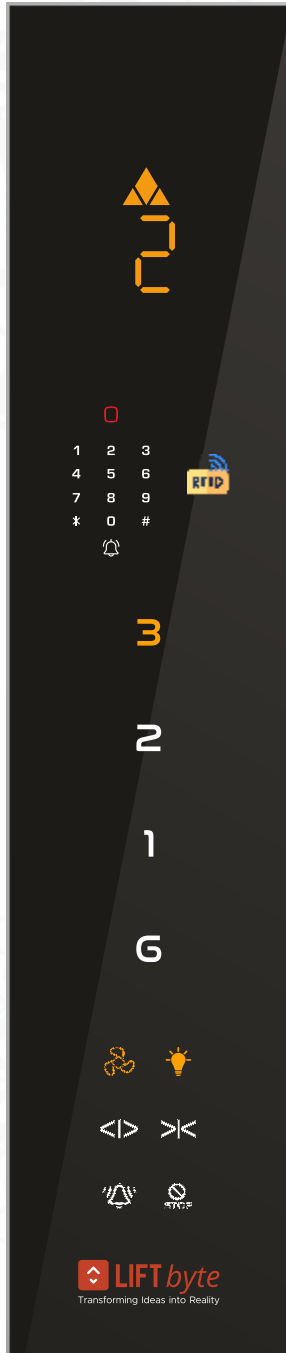

1000 mm X 200 mm
Black Acrylic

Curved Edges




1000 mm X 200 mm
Black Acrylic

Compatible with **all panels with parallel and serial** input and output

TOUCH | COP

WORLD'S SLIMMEST UNIVERSAL COP

You can now choose which floors you want to activate -
Giving you full control to customize your experience!

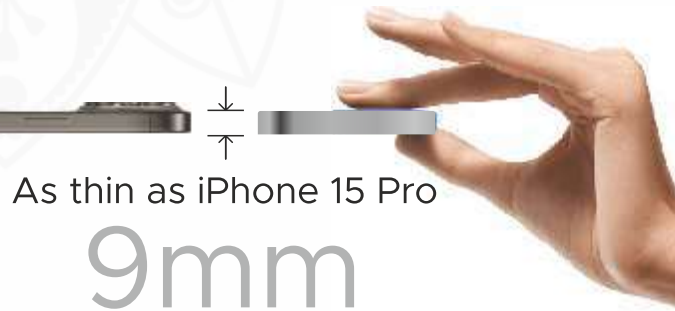

As thin as iPhone 15 Pro

9mm



800 mm X 200 mm
White Acrylic & Glass

Save upto **10,000/-**

The cost of travelling cable

Compatible with **all panels** with **parallel input and output**.
Runs on **4 wire RS485** protocol.

FRAME OPTIONS



Standard Frame
280 x 75 mm



Jumbo Frame
330 x 100 mm

FRAME COLOR OPTIONS



Black

Gold

Rose
Gold

Silver

The Circle of influence

Round AI Touch & Button LOP



One
LOP.
Multitude
Button Options

FRAME COLOR OPTIONS



Round LOP
Gold
Dia 140mm



Round LOP
Silver
Dia 140mm



Round LOP
Rosegold
Dia 140mm



Round LOP
Black
Dia 140mm

Super Elegant with PUSH BUTTON



Available Button Options



Round Button



Square Button

Curved Edges




SS Gold Mirror

Black Acrylic

SS Rosegold Mirror

COP Size: 500 mm X 200 mm

Compatible with **all panels with parallel** input and output

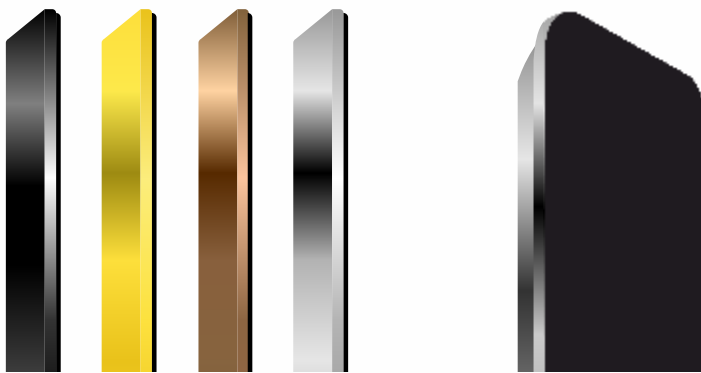

~ 6 Lac Pixels

10.1 Inch HD Display


Full Customisable

Custom Images


Upto 99 Floors

TOUCHFEEL | LOP & COP

acrylic - Semi Touch

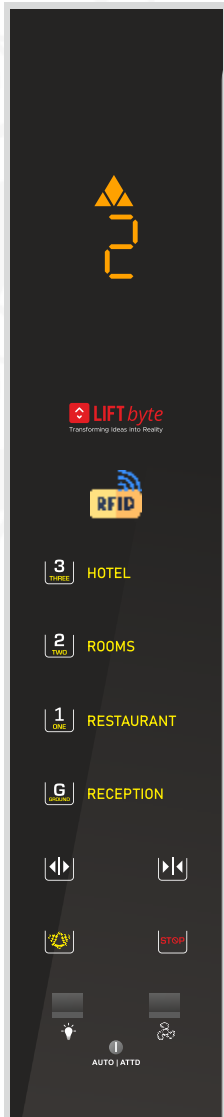

800 x 170 mm
Black
Touchfeel COP




280 x 75 mm
Touchfeel LOP



800 x 170 mm
WG
Touchfeel COP



280 x 75 mm
Touchfeel LOP

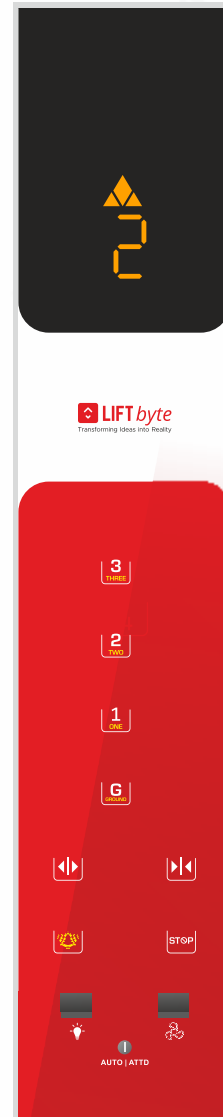

800 x 170 mm
BWR
Touchfeel COP



280 x 75 mm
Touchfeel LOP

 Original Design

 Safety

 Superior Buttons

 Full Acrylic

 High-end Performance

 RFID Card Reader

 Reliability and Service

 Boxed Assembly




India's Most Preferred ARD / UPS

Available from 5HP to 50HP

- Compact size with inbuilt battery wallmounted cabinet.
- Pan India installation support by our experts.
- Improved charger for Low AH batteries.

- Pure sinwave output with auto shutdown timer.
- Single card solution, easier to service.
- Multiple rescues on a single charge.

Specifications	LIFT UPS / ARD - Automatic Rescue Device				
Parameters	Units	Rating			
Model	iLIFT	5 HP	7.5 HP	10 HP	15 Ah
Operating DC Voltage	Volts	48 V	48 V	72 V	72 V
No of Batteries	Nos	4	4	6	6
Battery Capacity	Ah	7 AH		7 AH	



DUAL / SINGLE PHASE OUTPUT



PURE SINE WAVE

RUGGED
> 50K
INSTALLATIONS

RUGGED RELIABLE



INBUILT BATTERY SUPPORTED



7 STAGE CHARGING FOR BATTERY HEALTH

ACCESS CONTROL

RFID, Face ID, Fingerprint elevator security



Model: LB-120-B



Push Keypad



Support RFID Card (125KHz)
User Capacity: 2000



Password Enabled
Backup Enabled



Model: LB-120-T



Capacitive Touch



Support RFID Card (125KHz)
User Capacity: 2000



Password Enabled
Backup Enabled



Model: LB-103



Fingerprint
Biometric



Support RFID Card (125KHz)
User Capacity: 500



Password Enabled
Backup Enabled



Model: LB-103-T



Optical Fingerprint
Sensor | Biometric



Capacitive Touch



Support RFID Card (125KHz)
User Capacity: 2000



Password Enabled
Backup Enabled



Model: LB-104



Face ID
300 Faces
Storage



Fingerprint
Biometric



Ethernet
TCP/IP Support



Support RFID Card (125KHz)
User Capacity: 1000
Logs: 1,00,000



Password Enabled
Backup Enabled

ACCESSORIES

FIREMAN & ALARM



Silver



Rosegold




Gold




Black

Fireman & Alarm
150mm X 75mm


INSTRUCTION PLATE

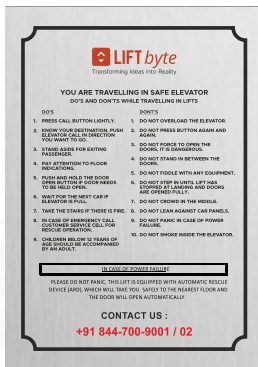

210 x 300 mm
SS Hairline
Instruction Plate

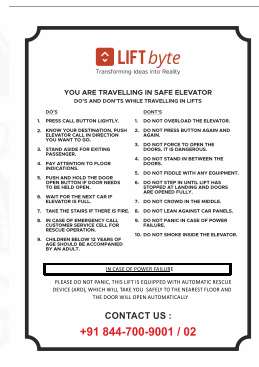


210 x 300 mm
White
Instruction Plate

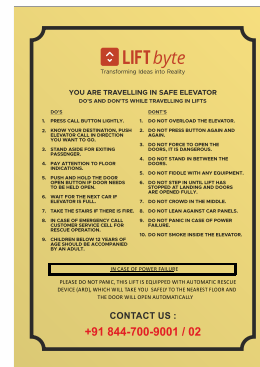

210 x 300 mm
Golden
Instruction Plate

LIFT HANDOVER KEY

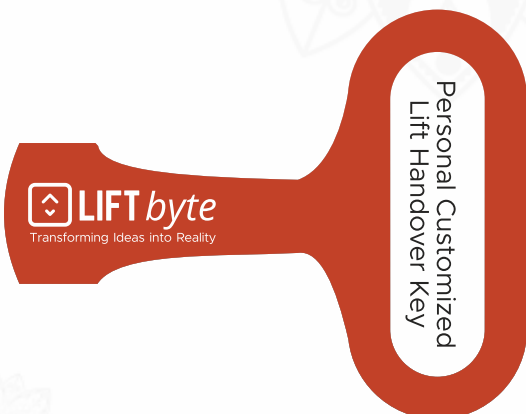

INTERCOM



ACCESSORIES

ELEVATOR DOOR SENSOR




India's First **Foldable** Door Sensor

✚ 154 BEAMS ✚ 32 LED PAIRS

✚ 2-PARTS COMPACT DESIGN

✚ EASY TO TRANSPORT

Technical Features		CURTAIN32_FOLD
Number of Infra Red Diodes		32Diodes
Response Time	Relay Output	61ms
	Transistor Output	37ms
Scanning Beams		154~94 Beams
Infrared Diodes Range		58.8mm
The Mimimum Door Opening		≤20mm
The Maximum Door Opening		≥1800mm
Detecting Range		0-4000mm
Operation Temperature		-20°C~+65°C
Light Immunity		100000 Lux
Protection Level		IP54
EMC (EN12015 EN12016)		General circuit level
LED Interpretation		1. Green LED and Red LED in Receiver on when blocked or in malfunction. 2. Green LED in receiver on and Red LED in receiver off without block.

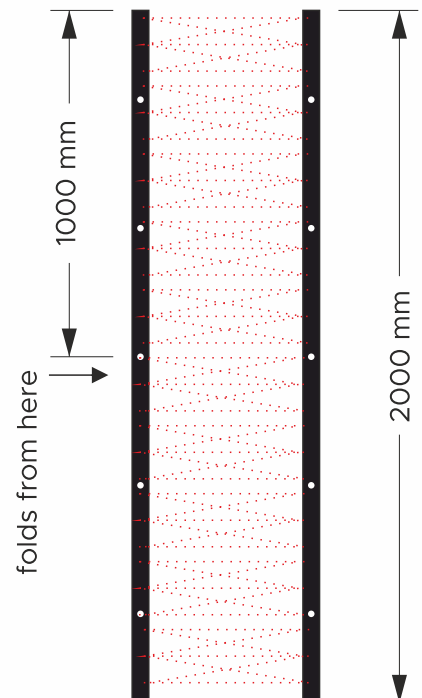



LIFTBYTE AUTOMATION PRIVATE LIMITED

AN ISO 9001:2015 CERTIFIED COMPANY

EMAIL

sales@liftbyte.com
www.liftbyte.com



ADDRESS

Plot No-108, Punjabi
Bagh Transport Center,
New Delhi - 110063



CONTACT US

931-012-5097
844-700-9001
844-700-9002



WhatsApp

EXPERIENCE US

Scan to Download
LIFTbyte Brochure

